# Serrat








The WOLKAVIA born before the need to realize a work of more quantity and quality, for the preparation of the area before the direct sowing, as well as for the regeneration of grassland.

The rotor POLSER of 650 mm of diameter provides a great aspiration to the soil, likewise, thanks to his large diametre, it retains the remains more time in its interior and mulch them 3 times more than a conventional machine.

# **CHARACTERISTICS**

- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Rotor POLSER of Ø 650 mm.
- ► Gearbox SERRAT 280 HP.
- ▶ 5 XPC side belt transmission.
- ► Forged agricultural hammers SERRAT.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.

- ► Front protection curtain.
- ► System antiwire in rotor.
- ► Double bearing on rear roller.
- ► Rear height-adjustable roller; Ø 323 mm.
- ▶ PTO 1,000 rpm.
- ▶ 3 lines of counter hammers.
- ▶ Model built under EC Normative.
- ► Safety indicators visible to personnel.

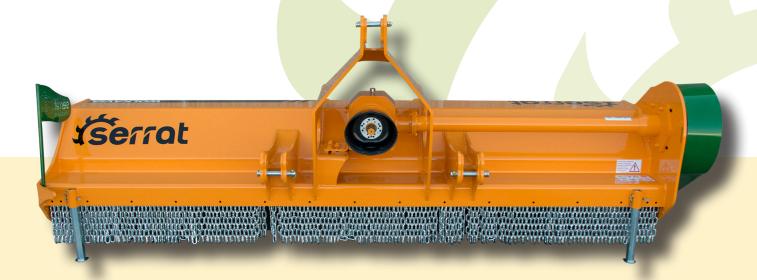

### System antiwire in rotor






MODEL					KG	Nº BELTS TYPE							
		mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
	T-2800	2800	89 - 120 149 - 200	28	1680	5 XPC	3071	121"	1570	62"	1300	51"	1000
	T-3200	3200	89 - 120 149 - 200	32	1744	5 XPC	3471	137"	1570	62"	1300	51"	1000
	T-3500	3500	93 - 125 150 - 240	32	1837	5 XPC	3771	148"	1570	62"	1300	51"	1000
	T-3800	3800	97 - 130 179 - 280	32	1929	5 XPC	4071	160"	1570	62"	1300	51"	1000
	T-4000	4000	149 - 200 179 - 280	40	2130	5 XPC	4271	168"	1570	62"	1300	51"	1000

## **OPTIONS**

► Hydraulic side shift

**▶** Double geardrives



**▶** Front chains

### **▶** Freewheel



► Rear gum



22310 Castejón del Puente (Huesca)-España Tfno. (+34) 974 417 830 www.serrat.com - comercial@serrat.es





The data presented in this catalog are provided for information purposes only and are not binding.