





Mulcher designed for tractors between 40 HP to 80 HP for the maintenance of vegetable mantle and for the elimination of remains of pruning up to 50 mm.



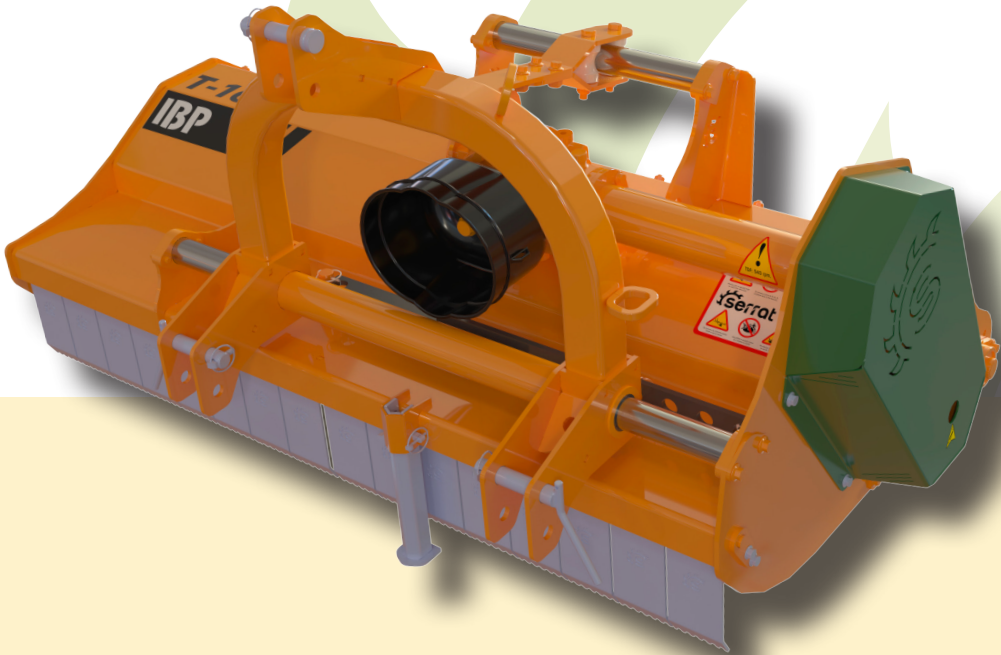



CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 6 mm.
- ▶ Tubular rotor of Ø 400 mm.
- ▶ Gearbox with freewheel included.
- ▶ 4 XPB side belt transmission.
- ▶ Forged hammers SERRAT special "grass".
- ▶ 2 lines of counter knives screwed.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 540 rpm.
- ▶ Double bearing on rear roller.
- ▶ Height-adjustable rear roller Ø 152 mm.
- ▶ Width cover belts 115 mm.
- ▶ Manual sliding hitch.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

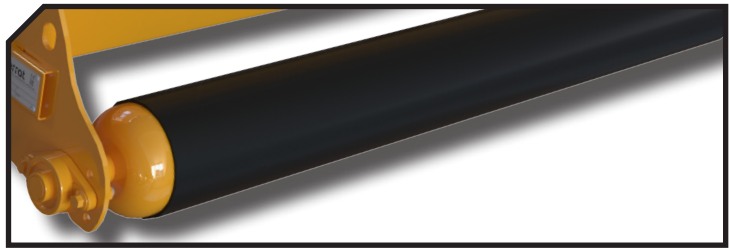


Detail of the roller




MODEL	 mm	 KW-HP		 KG	Nº BELTS TYPE				
						A mm-in	B mm-in	C mm-in	
T-1400	1400	30 - 40 60 - 80	12	395	4 XPB	1575-62"	1135-45"	1000-39"	540
T-1600	1600	37 - 50 60 - 80	12	420	4 XPB	1775-70"	1135-45"	1000-39"	540
T-1800	1800	45 - 60 60 - 80	16	435	4 XPB	1975-78"	1135-45"	1000-39"	540
T-2000	2000	52 - 70 60 - 80	18	475	4 XPB	2175-86"	1135-45"	1000-39"	540


OPTIONS

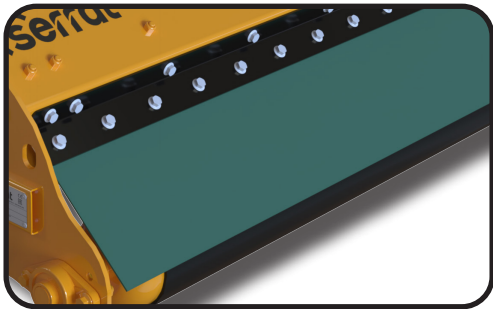


▶ Rear gum

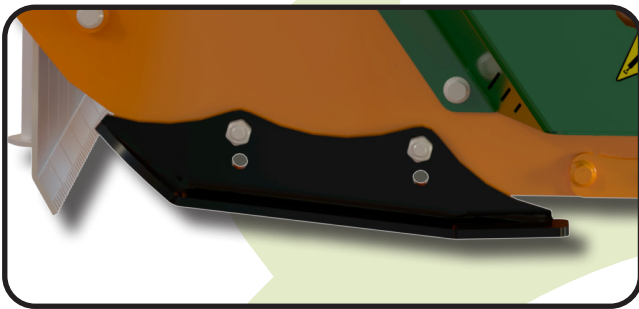

▶ Front adjustable skid shoes

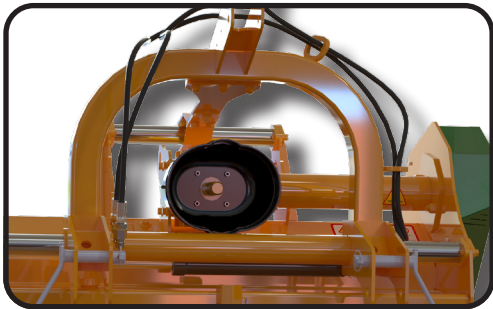

▶ Hydraulic sliding hitch

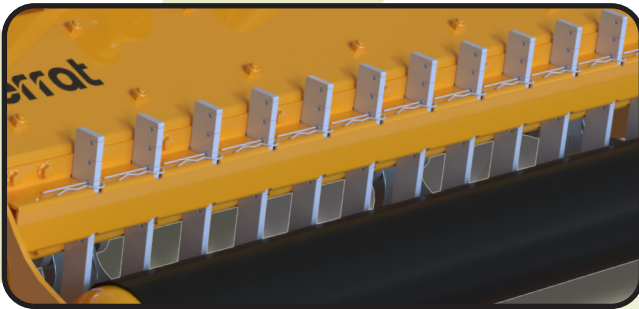

▶ Rear tine retainers



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tel. (+34) 974 417 830  
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.