

# serrat

## INTERPIQUET DOBLE

SEKURLAST



Double mechanical driven swing arms mower conceived to mow around trees, under fences, posts, crash barrier, vineyards, trees, etc. without any damage. Allowing in a single work process to clean two lines of plantation in an average speed of 3 km/h. We work with a width of 6.20/6.50 m with regard to the axis of the tractor (3.10/3.25 m in each sides).


Mechanical transmission by power take-off for tractors between 70 and 105 HP. Requiring a double effect hydraulics service for the adjustment of the air pressure and a simple effect service for the hydro pneumatic suspension.

### CHARACTERISTICS

- ▶ 3 point hitch - cat. II.
- ▶ Cutting diameter of 1,200 mm.
- ▶ Cutting width of 6,200 mm - 6,500 mm.
- ▶ Length for the transport of 3,400 mm.
- ▶ 3 retractable knives in each plate.
- ▶ Air pressure adjustment (1 double effect's service).
- ▶ Pushing control by hydropneumatic suspension (adjustable).
- ▶ Lower bowl of control on the ground and rear wheels.
- ▶ Pushing control by hydro pneumatic suspension (2 hydraulics simple effect).
- ▶ PTO 540 rpm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Pushing control by hydropneumatic suspension (adjustable)  
Hydraulic recovery control (adjustable)

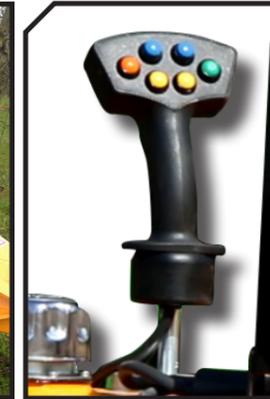

Height adjustable rear wheel



### MODEL

	 mm	 KW-HP	 3 x 2	 KG	 A mm-in	 B mm-in	 C mm-in	
T-6200	6200	51 - 70 78 - 105	3 x 2	1028	2536-100"	6200-244"	1200-47"	540
T-6500	6500	51 - 70 90 - 105	3 x 2	1032	2686-106"	6500-256"	1200-47"	540


### OPTIONS

- ▶ Double movable wheels



# serrat

Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tel. (+34) 974 417 830  
www.serrat.com - comercial@serrat.com

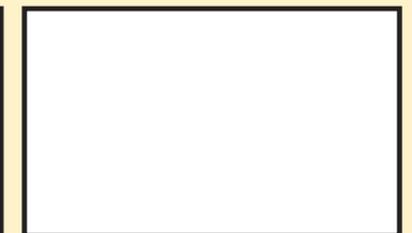

The data presented in this catalog are provided for information purposes only and are not binding.