



The cabezal MF-2 is a standard flow mulching attachment suitable to compact track loader of more than 5 t, stock with the hydraulic auxiliary existing circuit.


Suitable for the maintenance of small greenspaces, riverbanks, canes and bushes up to 60 mm of diameter.

CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 6 mm.
- ▶ Rotor POLSER of Ø 420 mm.
- ▶ Mulcher for head compact track loader having a weight until 5 T.
- ▶ 3 XPB side belt transmission.
- ▶ Safety chains.
- ▶ High speed and high strength bearings.
- ▶ Hydraulic gear motor.
- ▶ Valve of recirculation incorporated into the motor.
- ▶ Skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




Hydraulic gear motor

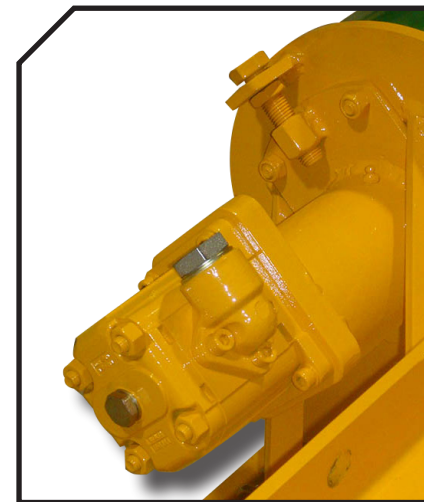

- (1) Rotor with grass flails or forged hammers
- (2) Safety chains




MODEL						N° BELTS TYPE					
	mm	HORSE POWER							min. req.	max. aut.	A mm-in
T-1400	1400	70-80 l/min	180 bar	12	40	560	3 XPB	1610-63"	940-37"	726-29"	2500
T-1600	1600	70-80 l/min	180 bar	16	48	600	3 XPB	1810-71"	940-37"	726-29"	2500
T-1800	1800	70-80 l/min	180 bar	16	48	638	3 XPB	2010-79"	940-37"	726-29"	2500

OPTIONS



- ▶ Hydraulic hood

- ▶ Hydraulic engine with pistons
- ▶ Hooking
- ▶ Electro-valve

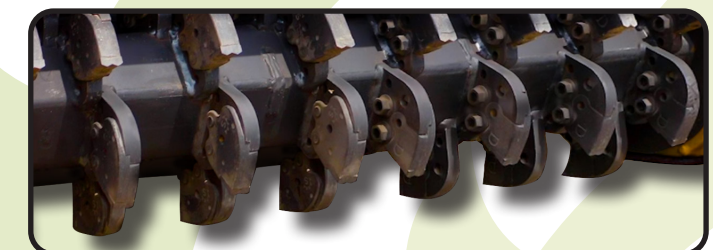

- ▶ Fixed tooth with tip in tungsten

