



Offset Mulcher for works of maintenance in green areas, ways, channels, gardens and agricultural works, for tractors of 35 - 80 HP.

Angulations of work: +90° / -50° and rear hood with two interchangeable positions.

Constructed in materials of high elastic limit, to reduce its weight and to be able to work with tractors of low power.

CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 8 mm.
- ▶ Rotor tubular of Ø 400 mm.
- ▶ Angulation +90° / -50°.
- ▶ 3 XPB side belt transmission.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Forged hammers SERRAT.
- ▶ Height-adjustable rear roller Ø 180 mm.
- ▶ PTO 540 rpm.
- ▶ Gearbox with freewheel included.
- ▶ Front protection curtain.
- ▶ Hydraulic lateral offset mulcher.
- ▶ Skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




Angulation
+90°



-50°



OPTIONS

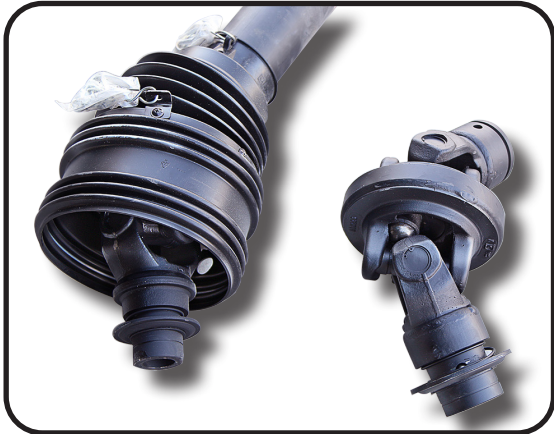


▶ Homocinetic knot

MODEL					KG	N° BELTS TYPE						
							A	B1	B2	C	D	E
	mm	KW-HP					mm-in	mm-in	mm-in	mm-in	mm-in	mm-in
T-1400	1400	26 - 35 59 - 80	12	445	3 XPB	1599-63"	1645-65"	1820-72"	510-20"	1650-65"	535-21"	540
T-1600	1600	34 - 45 59 - 80	16	470	3 XPB	1799-71"	1645-65"	1820-72"	510-20"	1850-73"	735-29"	540
T-1800	1800	37 - 50 59 - 80	16	500	3 XPB	1999-79"	1645-65"	1820-72"	510-20"	2050-81"	935-37"	540



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.