



Adaptable for excavators and special carriers having a weight between 15 and 25 t.

Steel-plate chassis of 10 mm with the hooking screwed on the top of the mulcher, which reinforce the chassis, giving the possibility of several positions of use.


Suitable for the maintenance of forest, riverbanks, bushes up to 120 mm of diameter.

CHARACTERISTICS


- ▶ Non-wear steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER + of Ø 550 mm.
- ▶ Mulcher for excavators having a weight between 15 and 25 T.
- ▶ 4 XPC side belt transmission.
- ▶ Double safety chains.
- ▶ High speed and high strength bearings.
- ▶ Hydraulic engine with pistons.
- ▶ Valve of recirculation incorporated into the motor.
- ▶ Skid shoes.
- ▶ Compact drive cover.
- ▶ Swinging forged forestry hammers 360° or fixed tooth with tip in tungsten or blades DRR.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




Hydraulic engine with pistons




FIXE TOP System



Swinging forged forestry hammers 360°

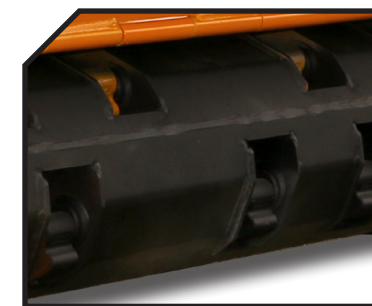

Blades DRR




Compact drive cover



Fixed tooth with tip in tungsten



MODEL								N° BELTS TYPE				
	mm	min. req.	max. aut.						A mm-in	B mm-in	C mm-in	RPM Rotor max.
T-1000	1000	150-160 l/min	350 bar	9	26	13	1125	4 XPC	1280-50"	1150-45"	803-32"	2000
T-1250	1250	150-160 l/min	350 bar	9	32	16	1265	4 XPC	1530-60"	1150-45"	803-32"	2000
T-1500	1500	150-160 l/min	350 bar	12	38	20	1445	4 XPC	1780-70"	1150-45"	803-32"	2000
T-1600	1600	150-160 l/min	350 bar	12	40	22	1495	4 XPC	1880-74"	1150-45"	803-32"	2000
T-1800	1800	150-160 l/min	350 bar	16	44	24	1645	4 XPC	2080-82"	1150-45"	803-32"	2000
T-2000	2000	150-160 l/min	350 bar	16	50	26	1785	4 XPC	2280-90"	1150-45"	803-32"	2000

OPTIONS

▶ Mechanical hood



▶ Centralized greasing

▶ Hydraulic hood




▶ Ripper

▶ Hooking



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com

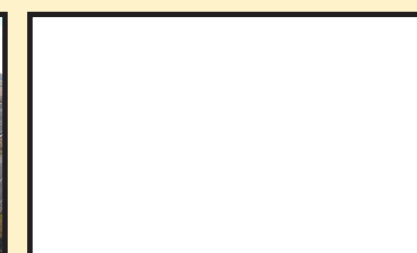

The data presented in this catalog are provided for information purposes only and are not binding.